




FLANGE A COLLARINO HUB FLANGES

CLASSE/CLASS
D - E
AWWA C 207

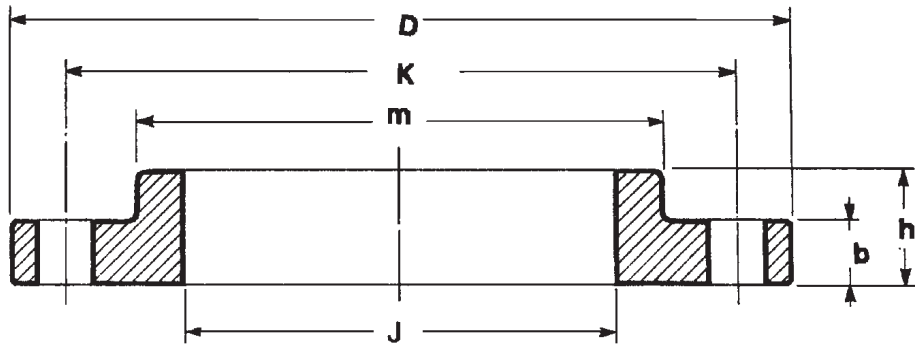

CLASSE D (175-150 psi) - CLASSE E (275 psi)

DIMENSIONS IN MM.

DN	O	J	b		h		m		FORATURA - DRILLING		
			D	E	D	E	D	E	N°	K	Ø ⁽¹⁾
26	870,0	665,2	25,4	50,8	44,5	85,5	724,0	724,0	24	806,5	34,6
28	927,0	716,0	25,4	52,4	44,5	87,5	774,5	781,0	28	863,6	34,6
30	984,5	776,8	25,4	54,0	44,5	89,0	825,5	832,0	28	914,4	34,6
32	1060,5	817,6	28,6	57,2	44,5	92,0	882,5	889,0	28	977,9	41,3
34	1111,5	868,4	28,6	58,7	44,5	93,5	933,5	940,0	32	1028,7	41,3
36	1168,5	919,2	28,6	60,4	44,5	95,5	984,5	997,0	32	1085,9	41,3
38	1238,5	970,0	28,6	60,4	44,5	95,5	1035,0	1060,5	32	1149,4	41,3
40	1289,0	1020,8	28,6	63,5	44,5	98,5	1092,0	1111,5	36	1200,2	41,3
42	1346,0	1071,8	31,8	66,7	44,5	101,5	1143,0	1168,5	36	1257,3	41,3
44	1403,5	1122,4	31,8	66,7	57,0	101,5	1194,0	1219,0	40	1314,5	41,3
46	1454,0	1172,2	31,8	68,3	57,0	103,0	1244,5	1270,0	40	1365,3	41,3
48	1511,5	1224,0	35,0	69,9	63,5	105,0	1295,5	1327,0	44	1422,4	41,3
50	1568,5	1274,2	35,0	69,9	63,5	105,0	1346,0	1378,0	44	1479,6	47,0
52	1625,5	1325,6	35,0	73,0	63,5	108,0	1397,0	1435,0	44	1536,7	47,0
54	1683,0	1376,4	35,0	76,2	63,5	111,0	1448,0	1492,0	44	1593,9	47,0
60	1854,0	1528,8	38,1	79,4	70,0	114,5	1600,0	1657,0	52	1759,0	47,0
66	2032,0	1554,2	38,1	85,7	70,0	124,0	1752,5	1816,0	52	1930,4	47,0
72	2197,0	1833,6	38,1	88,9	70,0	127,0	1905,0	1994,0	60	2095,5	47,0
78	2362,0	1986,0	44,5	88,9	76,0	136,5	2063,8	2146,5	64	2260,6	54,0
84	2533,5	2138,4	44,5	98,4	76,0	136,5	2222,5	2298,5	64	2425,7	54,0
90	2705,0	2291,0	50,8	108,0	82,5	146,0	2381,0	2457,5	68	2590,8	62,0
96	2876,5	2443,2	50,8	108,0	82,5	146,0	2540,0	2610,0	68	2755,9	62,0

TOLLERANZE DIMENSIONALI PER FLANGE AWWA DIMENSIONAL TOLERANCES FOR AWWA FLANGES	D	± 3,2 mm	b	+ 4,8 mm - 0 mm	k	± 1,6 mm
	J	+ 1,6 mm - 0 mm	h	+ 4,8 mm - 1,6 mm	Centro fori Holes spacing	± 0,8 mm

(1) Il Ø dei fori è più largo di mm 3,2 del Ø nominale del tirante
The holes Ø is mm 3,2 larger than nominal Ø of the bolt